

K15730 GOODS & PERSONS ELEVATORS



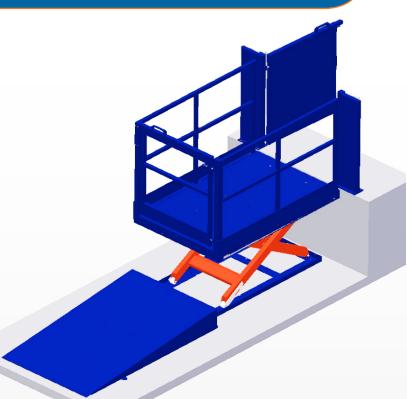



GOODS & PERSONS ELEVATORS - 1,0T - 1,85mx1,2m - 1,1m - 0,23m

Developed and manufactured for both the real estate business and factories, this goods and persons elevator with embarked people TM 1500 is driven by a PLC (EdmoLift UC60 electrics) that operates the sequence in dead man's control, only allowing the gates to open when the platform is in lower or upper position. Positioning is given by the upper and lower limit switch.

The platform has an extra layer of anti-slip chequered aluminium. This will ensure a non-slippery, corrosion free surface for both the passengers and the load. The whole lift is Zink grounded (C3 quality) and powder coated to optimize the corrosion sustainability.

It is equipped with remote power pack with steel cover. This enables accessible maintenance and uncomplicated visual inspection.

This project also includes an additional gate with electric interlock for the upper level.

The PLC offers a guidance during fault tracing by connection a service control unit with buzzer functionality. The buzzer indicates the problem by giving different sequences, easy to translate and circle the problem.

This goods & persons elevator is used to move staff and goods within industrial buildings and real estates between two levels. The three visible sides are protected with galvanized wire mesh.

By investing into this goods and persons elevator with a capacity of 1000 kg, equipped with a 1,85mx1.2m platform, you'll benefit from a lifting stroke of 1,1m and a closed height of 0,23m.

Feel free to contact us for further information about potential modification that would suit the

K15730 TM 1500 GOODS & PERSONS ELEVATORS CARACTERISTICS

TM 1500

| Capacity: | Length platform mm | Width platform mm | Lifting stroke mm | Closed height mm | Hydraulic power pack | Lifting time sec | Voltage VAC | Power kW | Ctrl voltage VDC | IP | Certificate |
|-----------|-----------------------|----------------------|----------------------|---------------------|-------------------------|---------------------|----------------|-------------|---------------------|----|-----------------------------|
| 1000 | 1850 | 1200 | 1100 | 230 | Remote | 17 | 3-380 | 1,5 | 24 | 54 | CE, Machine directive & EMC |

Security feautures: All gates equipped with Interlocks, zink grounded, remote power pack with steel cover, platform top in chequred aluminum (anti slip), wire mesh 3 sides

EdmoLift Solutions SPRL 40, boîte 1, devant l'Aîte 4031 – Liège BELGIUM Telephone: +33 1 82 88 93 70 / +32 2 808 43 58 Cell.: +33 6 29 81 13 35 Fax: +33 1 82 88 93 71 / +32 2 808 43 59

Org. no.: BEO 897 714 412 E-mail: jerome.laermans@edmolift.se

