



K16693

GOODS & PERSONS ELEVATORS

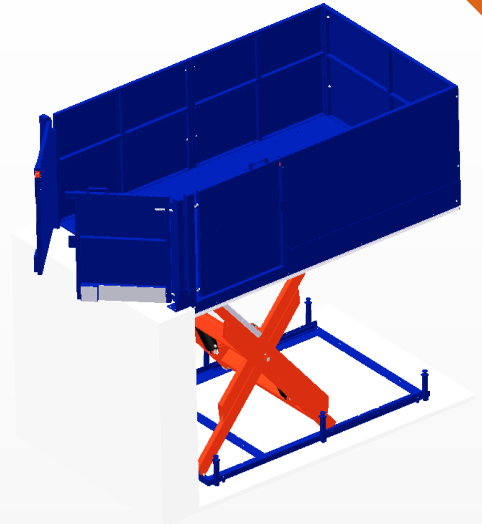

PRODUCT SEEN ON
WWW.LEANPAREDMOLIFT.FR

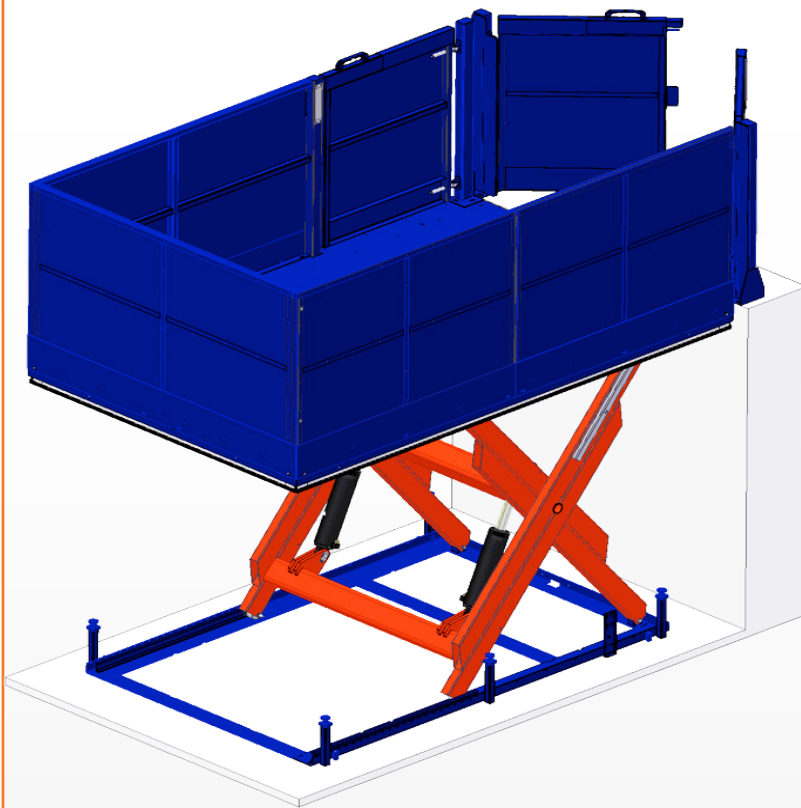

GOODS & PERSONS ELEVATORS – 1,5T – 3,0mx1,9m – 1,7m – 0,3m

Developed and manufactured for both the real estate business and factories, this goods and persons elevator with embarked people TT 3000 is driven by a PLC (EdmoLift UC60 electronics) that operates the sequence in dead man's control, only allowing the gates to open when the platform is in lower or upper position. Positioning is given by the upper and lower limit switch.

The platform has an extra layer of anti-slip chequered aluminium. This will ensure a non-slippery, corrosion free surface for both the passengers and the load. The platform rests on a mechanical stop in the lower position and ensures a fixed foundation for loading / unloading. Lifting eye bolts makes the table easy to put in place during installation by using a fork lift. Tipping protection, base frame and platform are fixated vertically on the wheel side by sliding blocks, ensures a rigid movement.

It is equipped with remote power pack with steel cover. This enables accessible maintenance and uncomplicated visual inspection.


This project also includes an additional gate with electric interlock for the upper level. A gate on the longside of the platform is used to enter and exit the lift in lower position.

The PLC offers a guidance during fault tracing by connection a service control unit with buzzer functionality. The buzzer indicates the problem by giving different sequences, easy to translate and circle the problem.

This goods & persons elevator is used to move staff and goods within industrial buildings and real estates between two levels. The three visible sides are protected with galvanized wire mesh.

By investing into this goods and persons elevator with a capacity of 1500 kg, equipped with a 3,0mx1.9m platform, you'll benefit from a lifting stroke of 1,7m and a closed height of 0,3m.

Feel free to contact us for further information about potential modification that would suit the specifications of your project.



K16693 TT 3000 GOODS & PERSONS ELEVATORS CHARACTERISTICS

TT 3000

Capacity: kg	Length platform mm	Width platform mm	Lifting stroke mm	Closed height mm	Hydraulic power pack	Lifting time sec	Voltage VAC	Power kW	Ctrl voltage VDC	IP	Certificate
1500	3000	1900	1700	300	Remote	27	3-380	1,5	24	54	CE, Machine directive & EMC

Security features: All gates equipped with Interlocks, emergency lowering, remote power pack with steel cover, platform top in chequered aluminum (anti slip), wire mesh 3 sides

EdmoLift Solutions SPRL
40, boîte 1, devant l'Aite
4031 – Liège
BELGIUM

Telephone: +33 1 82 88 93 70 / +32 2 808 43 58
Cell.: +33 6 29 81 13 35
Fax: +33 1 82 88 93 71 / +32 2 808 43 59
Org. no.: BE0 897 714 412
E-mail: jerome.laermans@edmolift.se

EdmoLift®
Solutions