

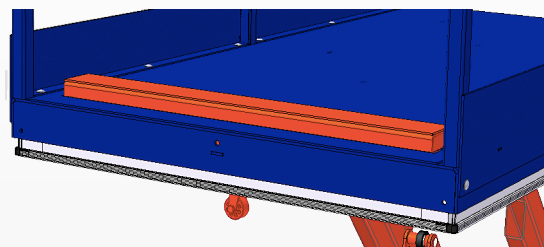


# K20694 GOODS ELEVATORS

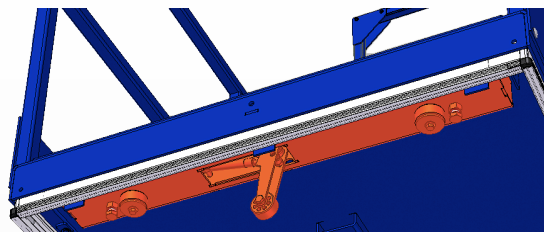

PRODUCT SEEN ON  
[WWW.LEANPAREDMOLIFT.FR](http://WWW.LEANPAREDMOLIFT.FR)

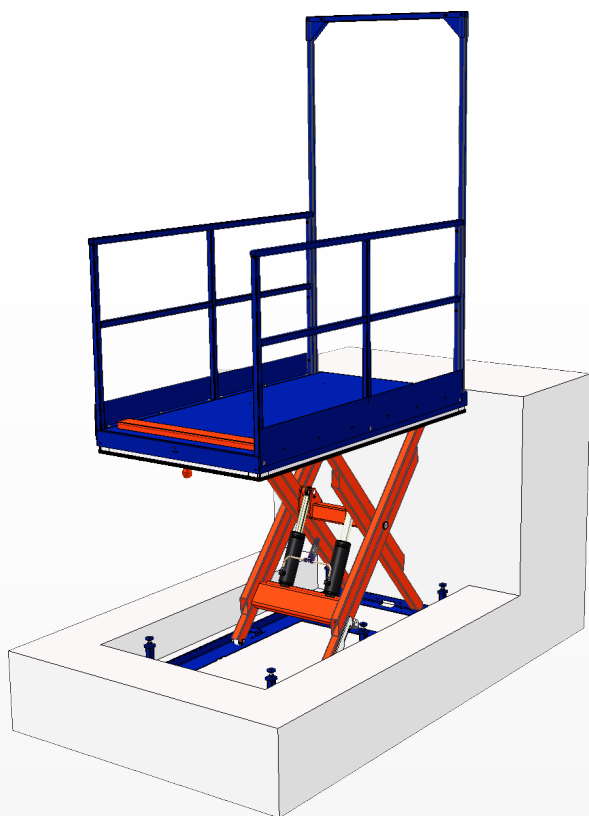

## GOODS ELEVATORS – 1,0T – 2,15mx1,2m – 1,3m – 0,26m

Developed and manufactured for both the real estate business and factories, this goods elevator TA 2000 is driven by a PLC (EdmoLift UC60 electronics) that operates the sequence in dead man's control. Positioning of the platform is given by the upper and lower limit switch.

The platform has an anti-slip chequered steel pattern. This will ensure a non-slippery surface for the load.

The lift table is equipped with a mechanical automatic rising stop that folds up when the platform leaves the bottom position. This prevents the goods to roll off the platform during movement. No upper gate is needed due to the integrated entrance / exit blockage in the guard rail.


It is equipped with remote power pack with steel cover. This enables accessible maintenance and uncomplicated visual inspection. The platform rests on a mechanical stop in the lower position and ensures a fixed foundation for loading / unloading. Lifting eye bolts makes the table easy to put in place during installation by using a fork lift.

The PLC offers a guidance during fault tracing by connection a service control unit with buzzer functionality. The buzzer indicates the problem by giving different sequences, easy to translate and circle the problem.

This goods elevator is used to move staff and goods within industrial buildings and real estates between two levels.

By investing into this goods and persons elevator with a capacity of 1000 kg, equipped with a 2,15m x 1.2m platform, you'll benefit from a lifting stroke of 1,3m and a closed height of 0,26m.

**Feel free to contact us** for further information about potential modification that would suit the specifications of your project.

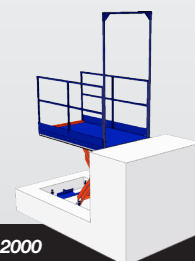

### K20694 TA 2000 GOODS ELEVATORS CHARACTERISTICS

TA 2000

Capacity: kg	Length platform mm	Width platform mm	Lifting stroke mm	Closed height mm	Hydraulic power pack	Lifting time sec	Voltage VAC	Power kW	Ctrl voltage VDC	IP	Certificate
1000	2150	1200	1300	260	Remote	30	3-380	1,5	24	54	CE, Machine directive & EMC

**Security features:** Chequered steel platform (anti slip), remote power pack, automatic load flap, guard rail with integrated entrance / exit blockage, lifting eyebolts and mechanical stops

**EdmoLift Solutions SPRL**  
40, boîte 1, devant l'Aite  
4031 – Liège  
BELGIUM

Telephone: +33 1 82 88 93 70 / +32 2 808 43 58  
Cell.: +33 6 29 81 13 35  
Fax: +33 1 82 88 93 71 / +32 2 808 43 59  
Org. no.: BE0 897 714 412  
E-mail: [jerome.laermans@edmolift.se](mailto:jerome.laermans@edmolift.se)

**EdmoLift®**  
**Solutions**