



# 02253920

## MOBILE TILTING WORKING STATION (MANUAL)

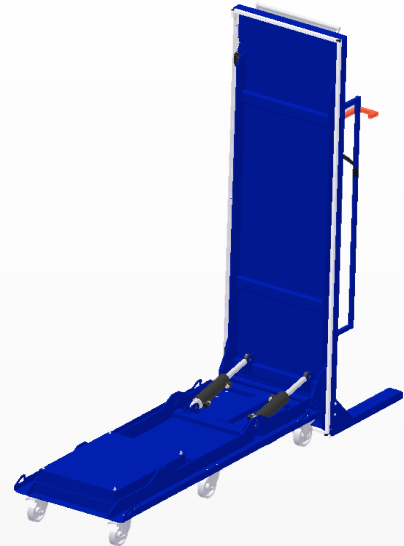

PRODUCT SEEN ON  
[WWW.LEANPAREDMOLIFT.FR](http://WWW.LEANPAREDMOLIFT.FR)

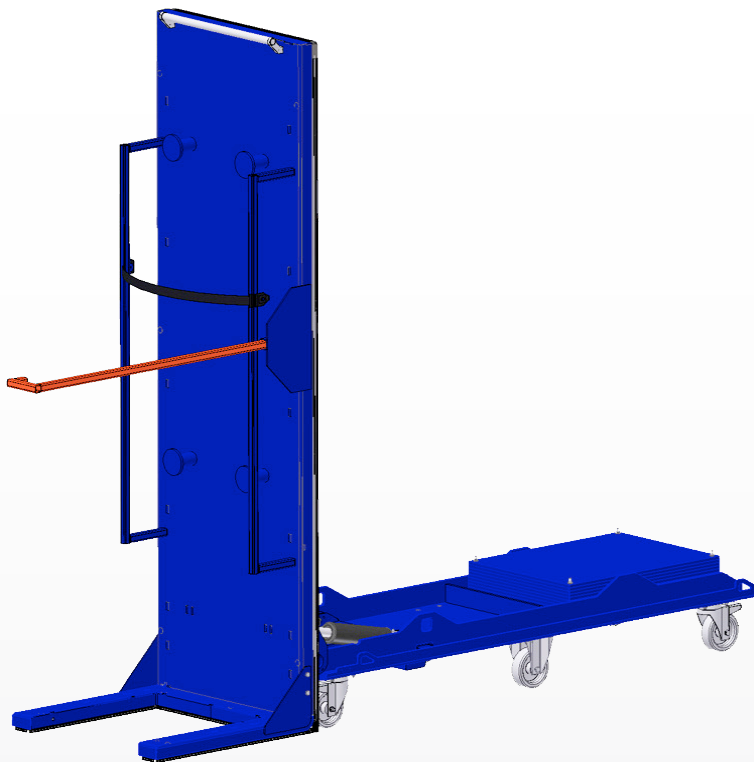

### MOBILE TILTING WORKING STATION (MAN) – 0,6T – 2,6x0,8m – 90° – 0,4m

Developed and manufactured for large electric cabinet assembly, this mobile working station EDL 130 is driven by a PLC (EdmoLift UC60 electronics) that operates the sequence in dead man's control, only allowing tilting of the platform when the seat belt is properly attached.

The platform is equipped with two load restraints on each long side and one arm that secures the load from falling front wise when tilting 90°.

Front legs are designed to give a direct floor access and to load the goods with a normal hand palette truck.


The electric cabinet arrives in standing position from a hand palette truck, inserted towards the platform and tilted to horizontal position. The closed height is calculated to give the operator the best ergonomic working height and accessibility into the cabinet.

The PLC offers a guidance during fault tracing by connection a service control unit with buzzer functionality. The buzzer indicates the problem by giving different sequences, easy to translate and circle the problem.

This mobile work station is used to move the goods between different working locations in the manufacturing area.

By investing into this mobile working station with a capacity of 600 kg, equipped with a 2,6x0.8m platform, you'll benefit from a tilting angle of 90° and a closed height of 0,4m.

**Feel free to contact us** for further information about potential modification that would suit the specifications of your project.

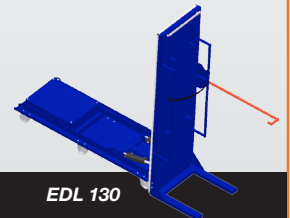

#### 02253920 EDL 130 MOBILE WORKING STATION CHARACTERISTICS

EDL 130

Capacity: kg	Length platform mm	Width platform mm	Tilting angle°	Closed height mm	Hydraulic power pack	Lifting time sec	Voltage VAC	Power kW	Ctrl voltage VDC	IP	Certificate
600	2570	800	90	401	Integrated	27/21	3-380	0,75	24	54	CE, Machine directive & EMC

**Security feautres:** Safety frame on the platform stops downwards movement when being affected. Seat belt to secure load with electricak interlock functionality during tilting.

**EdmoLift Solutions SPRL**  
40, boîte 1, devant l'Aite  
4031 – Liège  
BELGIUM

Telephone: +33 1 82 88 93 70 / +32 2 808 43 58  
Cell.: +33 6 29 81 13 35  
Fax: +33 1 82 88 93 71 / +32 2 808 43 59  
Org. no.: BE0 897 714 412  
E-mail: [jerome.laermans@edmolift.se](mailto:jerome.laermans@edmolift.se)

**EdmoLift®**  
**Solutions**